

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/050846

International filing date: 28 February 2005 (28.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: EP  
Number: 04100884.8  
Filing date: 04 March 2004 (04.03.2004)

Date of receipt at the International Bureau: 04 April 2005 (04.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

04100884.8

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr:  
Application no.: 04100884.8  
Demande no:

Anmeldetag:  
Date of filing: 04.03.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

N.V. BEKAERT S.A.  
Bekaertstraat 2  
8550 Zwevegem  
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Metal element coated with a coating layer comprising an inherently conductive polymer

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H01B/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PL PT RO SE SI SK TR LI



### **Field of the invention.**

The invention relates to a metal element coated with a coating layer comprising an inherently conductive polymer having at least one negative group in its backbone structure.

5 The invention further relates to an article comprising at least one metal element embedded in a polymer material.

### **Background of the invention.**

Inherently conductive polymers (ICP's) are known in the art (B.

10 Wessling, From conductive polymers to organic metals, Chemical Innovation, 2001, V 311, N1 (jan), p. 34 – 40).

They have been proposed as corrosion inhibitors. However, in many cases, as the metal reactivity increases, the corrosion rate increases also and hence, counteracts the inhibitive action of the ICP's.

15 According to the IUPAC recommendations of 1994, reactivity is applied to chemical species, in this case a metal, where the term expresses a kinetic property, in this case the kinetics of mass loss during a corrosion reaction.

20 A species is said to be more reactive or to have a higher reactivity than some other (reference) species if it has a larger rate constant for a specified elementary reaction.

A fast indication of the reactivity can be found in the measurement of the corrosion potential, but a more reliable analysis is the measurement of the potential current relationship of a metal in a corrosive environment according to the Butler-Volmer relationship and/or as plotted in an Evans diagram.

25 The metal reactivity may be increased by machining, by increasing the surface roughness and/or by deforming the metal. As a consequence, ICP's can show an unacceptable adhesion to metal substrates and they offer only limited success as anti-corrosion coating on metal substrates.

30

### **Summary of the invention.**

It is an object of the present invention to provide a coating layer avoiding the drawbacks of the prior art.

It is a further object of the invention to provide a coating layer that can be tailored for certain applications such as applications requiring a superior corrosion resistance.

5 It is another object of the invention to provide an article comprising at least one metal element embedded in a polymer material characterized by a good adhesion between the metal element and the polymer material.

10 According to a first aspect of the present invention, a metal element coated at least partially with a coating layer is provided. The coating layer comprises a backbone structure of an inherently conductive polymer (ICP). The ICP comprises at least one negative group in its backbone structure.

15 Possibly, the ICP comprises two or more negative groups in its backbone structure.

The inherently conductive polymer can further be doped with a metal ion. Possibly, the inherently conductive polymer is doped with more than one metal ion.

20 The metal ion or ions can be chosen to influence the properties of the coating layer, for example to optimize the adhesion characteristics of the coating layer to a polymer material in which it is embedded.

25 Preferably, the inherently conductive polymer is polymerized on the metal element. Most preferably, the inherently conductive polymer is polymerized in situ on the metal element.

With in situ polymerization is meant that the polymerization occurs in the application bath starting from a monomer solution.

30 Contrary to ICP coatings known in the art, the ICP used in the coating layer according to the present invention is used as a backbone structure for the negative group or groups and possibly also for the metal ion or ions.

By choosing the negative group and the metal ion, the characteristics of the coating layer such as the adhesion and/or corrosion characteristics can be influenced.

5      Inherently conductive polymers

Generally, intrinsically conductive polymers (ICP's) are organic polymers that have poly-conjugated  $\pi$  electron systems (e.g. double bonds, aromatic or heteroaromatic rings or triple bonds). ICP's are able to conduct an electrical current due to a specific conjugated structure in the molecule.

10      Examples of suitable ICP's are polyaniline, polypyrrole, polythiophene, polyphenylenevinylene, polydiacetylene, polyacetylene, polyquinoline, polyphenylenevinylene, polyheteroarylenevinylene and derivatives, copolymers and mixtures thereof.

15      Negative groups

As negative groups in principle any organic or inorganic negative group or molecule can be considered either groups or molecules having a negative charge or groups or molecules containing at least one atom which is nucleophilic oriented due to a free electronpair on the atom, resulting in a high electrondensity : e.g. oxygen, sulphur, nitrogen.

20      Examples of negative groups comprise for example phosphate, sulphate, chromate, molybdate, permanganate, silicate, nitrate, sulfonate, oxalate, formiate, thiol.

25      Examples of negative molecules having a high electrondensity comprise for example silanes, thiophene, thiophthene, organic sulfides, e.g. thiophenol.

30      The negative group is preferably a group interacting with the metal substrate in order to increase the corrosion resistance of the metal by increasing the electrochemical potential of that specified metal. The potential of the metal is increased until a passive behavior is reached;



e.g. for steel preferred negative groups are phosphate, chromate or nitrate.

5 The negative group or groups are preferably present in a concentration between 0.01 and 50 wt% of the coating layer. More preferably, the concentration of the negative group or groups is between 0.1 and 10 wt%.

The concentration depends upon the polymer material to which the hybrid ICP coating will react.

10

#### Metal ions

As described above the inherently conductive polymer can be doped with one or more metal ion. The metal ion is preferably selected from the group consisting of the transition elements in the periodic table of elements, the earth alkali elements and the elements from group III and IV, such as Mg, Ca, Sr, Ba, V, Cr, Fe, Co, Ni, Cu, Zn, Zr, Mo, Cd, Ce, Al and Sn.

15

The selection of the metal ion is based on the polymer material to which it should react.

20

In case the polymer material comprises rubber, cobalt is a preferred metal ion.

Zinc can be preferred in case an increase in corrosion protection is desired.

25

The metal ion is preferably present in a concentration ranging between 0.01 to 5 wt%. More preferably, the metal ion is present in a concentration between 0.04 to 0.15 wt %.

In case the coating layer is doped with more than one metal ion, each metal ion is present in a concentration between 0.01 and 5 wt%.

30

#### Metal element

The metal element may comprise an elongated metal element or a metal structure comprising at least one elongated metal element.

As elongated metal element, a metal wire, a metal cord, a metal tape or ribbon can be considered.

The elongated metal element may have any cross-section such as a circular, oval or flat (rectangular) cross-section.

5      The tensile strength of a metal element is preferably higher than 1500 N/mm<sup>2</sup>. The range of the tensile strength is for example between 1500 and 4000 N/mm<sup>2</sup>.

It may be desired to use metal cords having a structural elongation.

10      As metal structure any structure comprising a number of elongated metal elements can be considered. Examples of metal structures comprise woven, non-woven, braided, knitted or welded structures.

15      Any metal or metal alloy can be used to provide the metal elements of the composite article according to the invention.

Preferably, the metals or metal alloys are selected from iron, titanium, aluminium, copper and alloys thereof.

Preferred alloys comprise high carbon or stainless steel alloys.

20      The metal element or the structure comprising a number of metal elements can be coated with one or more metal or metal alloy coating before the coating layer according to the present invention is applied.

25      Preferred metal or metal alloy coatings comprise zinc and zinc alloy coatings such as zinc-copper, zinc-aluminum, zinc-manganese, zinc-cobalt alloy, zinc-nickel alloy, zinc iron alloy or zinc-tin alloy coatings. A preferred zinc-aluminum coating comprises a zinc coating comprising 2 to 10 % Al and possibly 0.1 to 0.4 % or a rare earth element such as La and/or Ce.

30      According to a second aspect of the present invention, an article comprising a metal element as described above embedded in a polymer material is provided.

Any thermoplastic material can be considered as polymer material. Examples comprise polyolefins such as polyethylene or polypropylene; polyamides; polyurethanes; polyesters; rubbers such as polyisoprene, chloroprene, styrene-butadiene, butyl rubber, nitrile and hydrogenetated nitrile rubbers, EPDM, ABS (acrylonitrile butadiene styrene) and PVC.

**Brief description of the drawings.**

The invention will now be described into more detail with reference to the accompanying drawings wherein

- 10       - Figure 1 shows an example of a polymerization reaction of a conductive polymer;
- Figure 2 shows an example of a polymerization reaction whereby a negative group is added to the backbone structure of the ICP;
- Figure 3 and 4 show two embodiments of the electrochemical in situ application of a coating layer according to the present invention;
- 15       - Figure 5A to Figure 5D show metal substrates coated with a coating layer according to the present invention.

20       **Description of the preferred embodiments of the invention.**

Figure 1 shows an example of a polymerization reaction :

- step A comprises the electrochemical oxidation of the monomer 12 to form radical 14;
- step B comprises the polymerization of the monomer 14 to form the polymer 16 (polypyrrole).

Figure 2 shows the addition of a negative group 24 within the polymer structure 22 to form the structure 26 or 28.

In the example shown in Figure 2, thiophene is added to a polypyrrole structure. Thiophene is chosen to increase the adhesion of the metal element to the polymer (rubber) in which the metal element is embedded.

Figure 3 and 4 show two embodiments of the electrochemical in situ application of a coating layer according to the present invention. Figure 3 shows a batch process for the application of the coating layer, whereas Figure 4 shows a continuous process.

5

As shown in Figure 3, the substrate to be coated 34 is placed in a bath 31. The bath comprises a solution 32 comprising the ICP and all other constituents of the coating layer.

10

A power source 33 is negatively connected to a counter electrode 36 (the cathode) and positively connected to the metal substrate to be coated 34. The substrate to be coated 34 is functioning as anode.

15

Figure 4 shows a continuous method for the application of a coating layer according to the present invention on an elongated metal substrate such as a steel wire.

The steel wire 41 is introduced in a bath 42 thereby guided by rolls 43. The bath 41 comprises a solution 44 comprising the ICP and all other constituents of the coating layer.

20

A power source 45 is negatively connected to a counter electrode 46 (the cathode) and positively connected to the steel wire 41. The steel wire 41 is functioning as anode.

25

Figure 5a shows a metal substrate 50 having an oxide layer 52. The metal substrate is coated with a coating layer 54 according to the present invention. The coating layer 54 comprises an ICP forming a backbone structure.

30

In the coating layer of Figure 5b, counter ions 55 are added to the backbone structure 54.

In the embodiment of Figure 5c, the coating layer 54 is further tailored by adding one or more organic radical 56 such as thiophene in the backbone structure 54.

In the embodiment of Figure 5d positive metal ions are added to further influence the characteristics of the coating layer.

As an example,  $\text{Co}^{2+}$  is added to increase the adhesion of the coating layer 54 to rubber.

5

Some examples of steel wires with a coating layer according to the present invention are tested and are compared with a non-treated steel wire.

10

Examples 1 to 8 illustrate the influence of a coating layer on the corrosion resistance of a steel wire, examples 9 to 12 illustrate the influence of a coating layer according to the present invention to four different rubber compounds.

15

The steel wires are manufactured as follows. Starting from a rod wire, the wire is drawn in one or more steps until the desired diameter is obtained. Subsequently, the steel wires are coated with a coating layer according to the present invention by a method as shown in Figure 4. The application solution is prepared starting from a monomer solution. The solution can be made in an inorganic solvent such as water or in an organic solvent such as propylenecarbonate, acetonitrile, methanol, ethanol, propanol, acetone or other solvents. The selection of the solvent depends upon the application. For certain metal substrates, such as carbon steel substrates, water is preferred. For metal substrates like aluminum, titanium or alloys like stainless steel organic solvents are preferred.

20

25

30

The corrosion behaviour of the tested steel wires is simulated and determined according to the standard procedure : Corrosion tests and standards : application and interpretation, ASTM MNL 20, pp. 75-80, ASTM G3-89, ASTM G5-82, ASTM G15-85a and ASTM STP 727.

For the analysis of the corrosion behaviour, the polarization resistance  $R_p$  is measured. The higher the value of  $R_p$ , the better the corrosion resistance.

Another parameter, next to the value of the polarization resistance  $R_p$ , is the so-called "inhibition rating" as defined in "Compendium of Chemical Terminology", IUPAC Recommendations, Blackwell Scientific Publications, 1987, p. 198 :

5  $I = (V_0 - V) / V_0$

wherein

$I$  represents the rate of corrosion inhibition (in percent)

$V_0$  represents the corrosion rate of a non-treated steel wire with  $V_0 = 1/R_p$

10  $V$  represents the corrosion rate of a treated steel wire, with  $V = 1/R_p$

Example 1 comprises a non-treated steel wire. In examples 2 to 8, the application solution comprises 0.1 M of ICP monomer pyrrole in water to which several negative groups are added.

15

The composition of the application solution of the different examples is shown in Table 1.

During the application of the coating layer a constant current of 1.25 mA/cm<sup>2</sup> is applied.

20

After the application of the coating layer,  $R_p$  was measured in a solution of 0.05 M K<sub>2</sub>SO<sub>4</sub>. The percentage corrosion inhibition was calculated based on the non-treated steel wire. The percentage corrosion inhibition is given in the last column of Table 1.

Table 1 : Corrosion inhibition (expressed as % corrosion inhibition compared to non-treated steel wire)

	Concentration in the application solution				Corrosion inhibition (%)
Example 1	/	/	/	/	0
Example 2	0.1M pyrrole	0.1M oxalic acid	/	/	18.1
Example 3	0.1M pyrrole	0.1M oxalic acid	0.1M Na formiate	/	90.5
Example 4	0.1M pyrrole	0.1M oxalic acid	0.1M Na H phosphate	/	88.5
Example 5	0.1M pyrrole	0.1M oxalic acid	0.1M K nitrate	/	71.4
Example 6	0.1M pyrrole	0.1M oxalic acid	0.1M phosphoric acid	/	71.9
Example 7	0.1M pyrrole	0.1M oxalic acid	0.1M citric acid	0.1 M NaH phosphate	82.4
Example 8	0.1M pyrrole	0.1M K H phtalate			-4.2

5

In examples 10 to 12 the adhesion between a steel wire coated with a coating layer according to the present invention to four different standard rubber compounds used for car and truck tyre manufacturing is determined and compared with the adhesion obtained between a non-treated steel wire and these rubber compounds (example 9).

10

The steel wires are manufactured as described above.

The coating layer of examples 10 to 12 is applied by a method as shown in Figure 4.

5 The coating layer of example 10 is applied from an application solution comprising 0.1 M of ICP monomer pyrrole with 0.1 M oxalate.

The coating layer of example 11 and 12 is applied from an application solution comprising 0.1 M of ICP monomer pyrrole, 0.1 M oxalate and 0.1 M thiophene.

10 In example 11, the bath circulation was high, whereas in example 12 the bath circulation was low.

During application a constant current of 1.25 mA/cm<sup>2</sup> is applied.

Adhesion between the metal substrate and the polymer material is determined as follows.

15 A non-treated steel wire and a steel wire coated with a coating layer according to the present invention are embedded in an industrial rubber composition. Subsequently, the rubber comprising the steel wires is vulcanized.

20 Both steel wires are pulled out from the vulcanized rubber. The forces necessary to pull out the steel wires are measured. By comparing the forces needed to pull out the "adherence loss rating" is determined.

Such a test has been carried out according to ASTM D229-(93) "Standard test method for adhesion between steel tire cores and rubber" and according to BISFA (The International Bureau for the  
25 standardization of man-made fibres) No. E12 ("Determination of static adhesion to rubber compound").

The adhesion results are shown in table 2.



Table 2 adhesion tested as pull out force (expressed in Newton)

	Compound 1	Compound 2	Compound 3	Compound 4
Example 9	160	201	566	307
Example 10	221	332	656	287
Example 11	510	1213	832	789
Example 12	286	145	487	132

**CLAIMS**

- 5           1. A metal element coated at least partially with a coating layer, said coating layer comprising a backbone structure of an inherently conductive polymer, said inherently conductive polymer comprising at least one negative group in its backbone structure.
- 10           2. A metal element according to claim 1, whereby said inherently conductive polymer is polymerized on said metal element.
- 15           3. A metal element according to claim 1 or 2, whereby said inherently conductive polymer is further doped with at least one metal ion.
- 20           4. A metal element according to any one of the preceding claims, whereby said inherently conductive polymer is selected from the group consisting of polyaniline, polypyrrole, polythiophene, polyphenylenevinylene, polydiacetylene, polyacetylene, polyquinoline, polyphenylenevinylene, polyheteroarylenvinylene and derivatives, copolymers and mixtures thereof.
- 25           5. A metal element according to any one of the preceding claims, whereby said negative group comprises an inorganic or organic negative group.
- 30           6. A metal element according to any one of claims 2 to 5, whereby said metal ion is selected from the group consisting of the transition elements of the periodic table of elements, the earth alkali elements and the elements from group III and IV.
7. A metal element according to any one of the preceding claims, whereby said metal element comprises an elongated metal element.
8. A metal element according to claim 7, whereby said elongated metal element comprises a metal wire, a metal cord or a metal tape.

- 5
9. A metal element according to any one of the preceding claims, whereby said metal element comprises a structure comprising at least one elongated metal element.
- 10
10. A metal element according to claim 9, whereby said structure comprises a woven, non-woven, braided, knitted or welded structure.
- 10
11. A metal element according to any one of the preceding claims, whereby said metal element is coated with a metal or metal alloy coating.
- 15
12. An article comprising at least one element as defined in any one of claims 1 to 11 embedded in a polymer material.

**ABSTRACT**

5       The invention relates to a metal element coated at least partially with a coating layer. The coating layer comprises a backbone structure of an inherently conductive polymer. The inherently conductive polymer comprises at least one negative group in its backbone structure. The invention further relates to an article comprising at least one such metal element embedded in a polymer material.



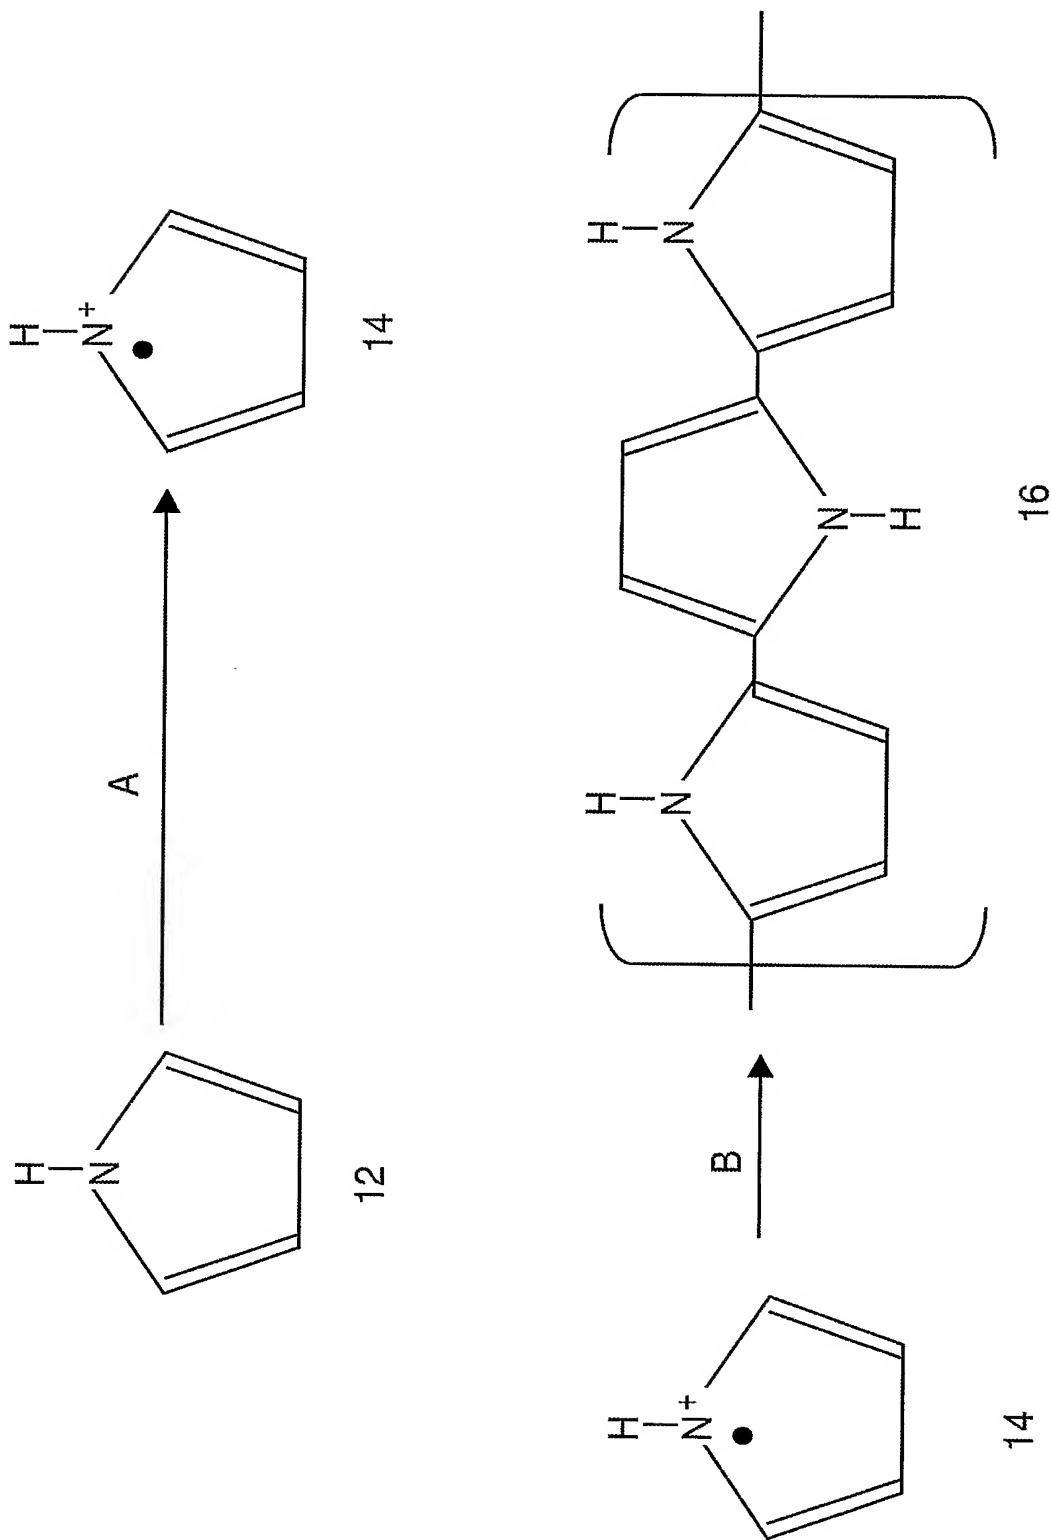
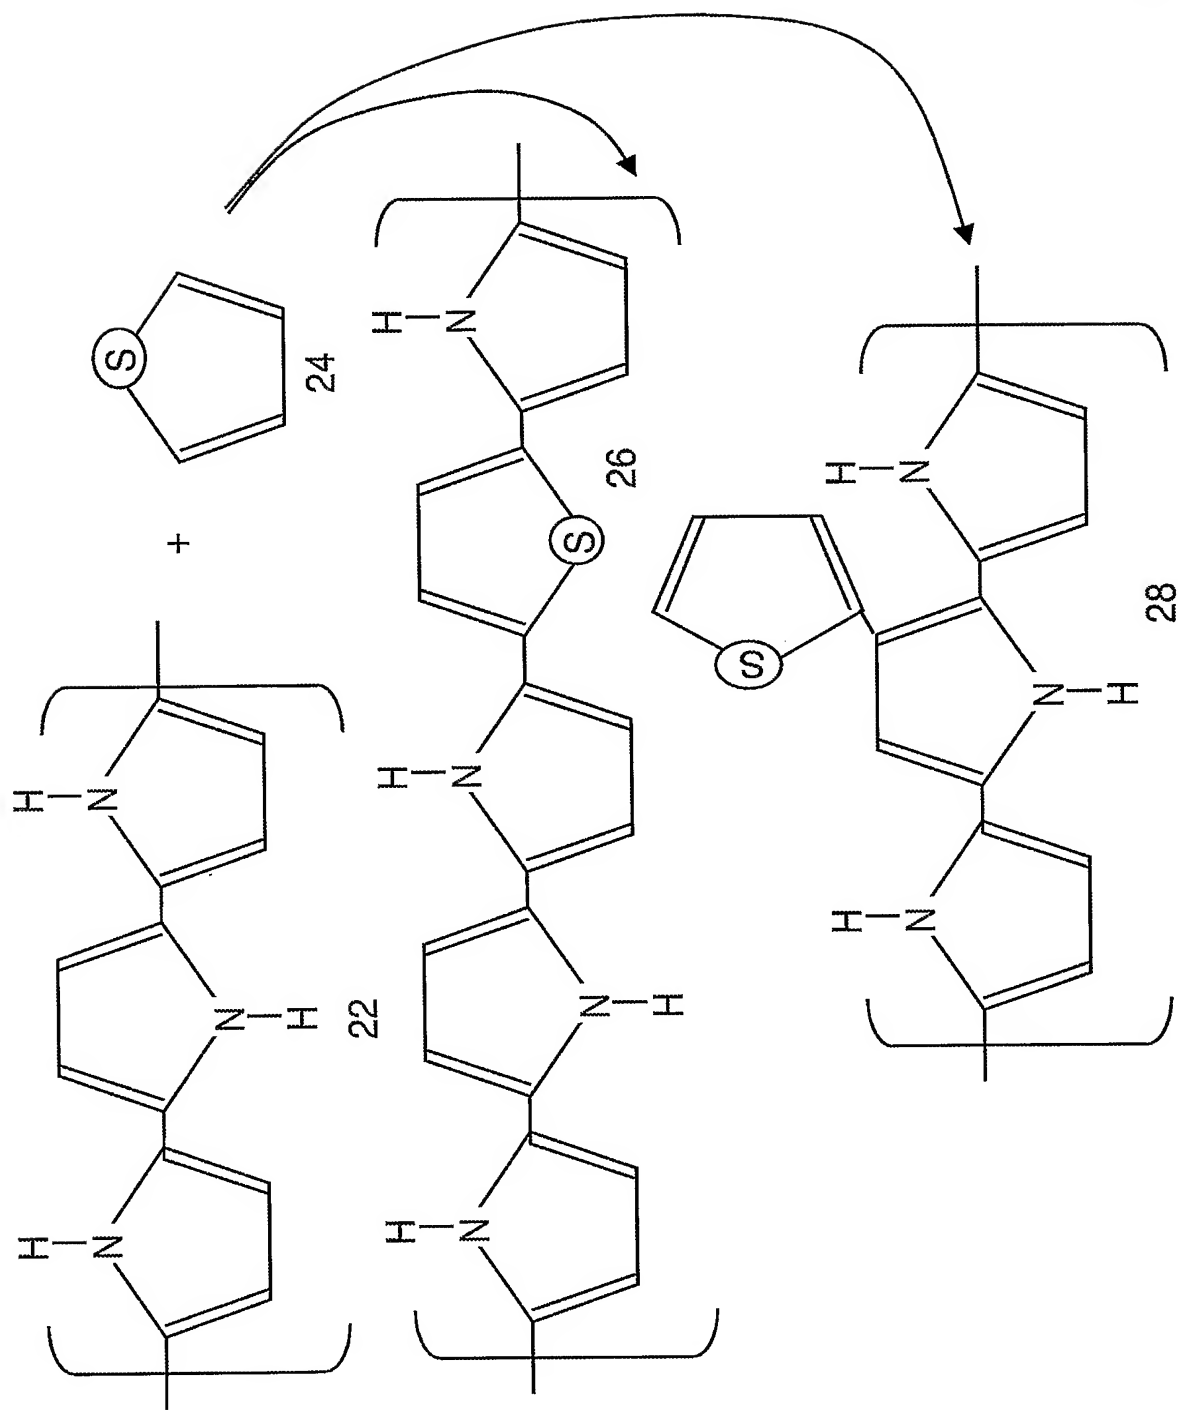


Fig. 1



**Fig. 2**

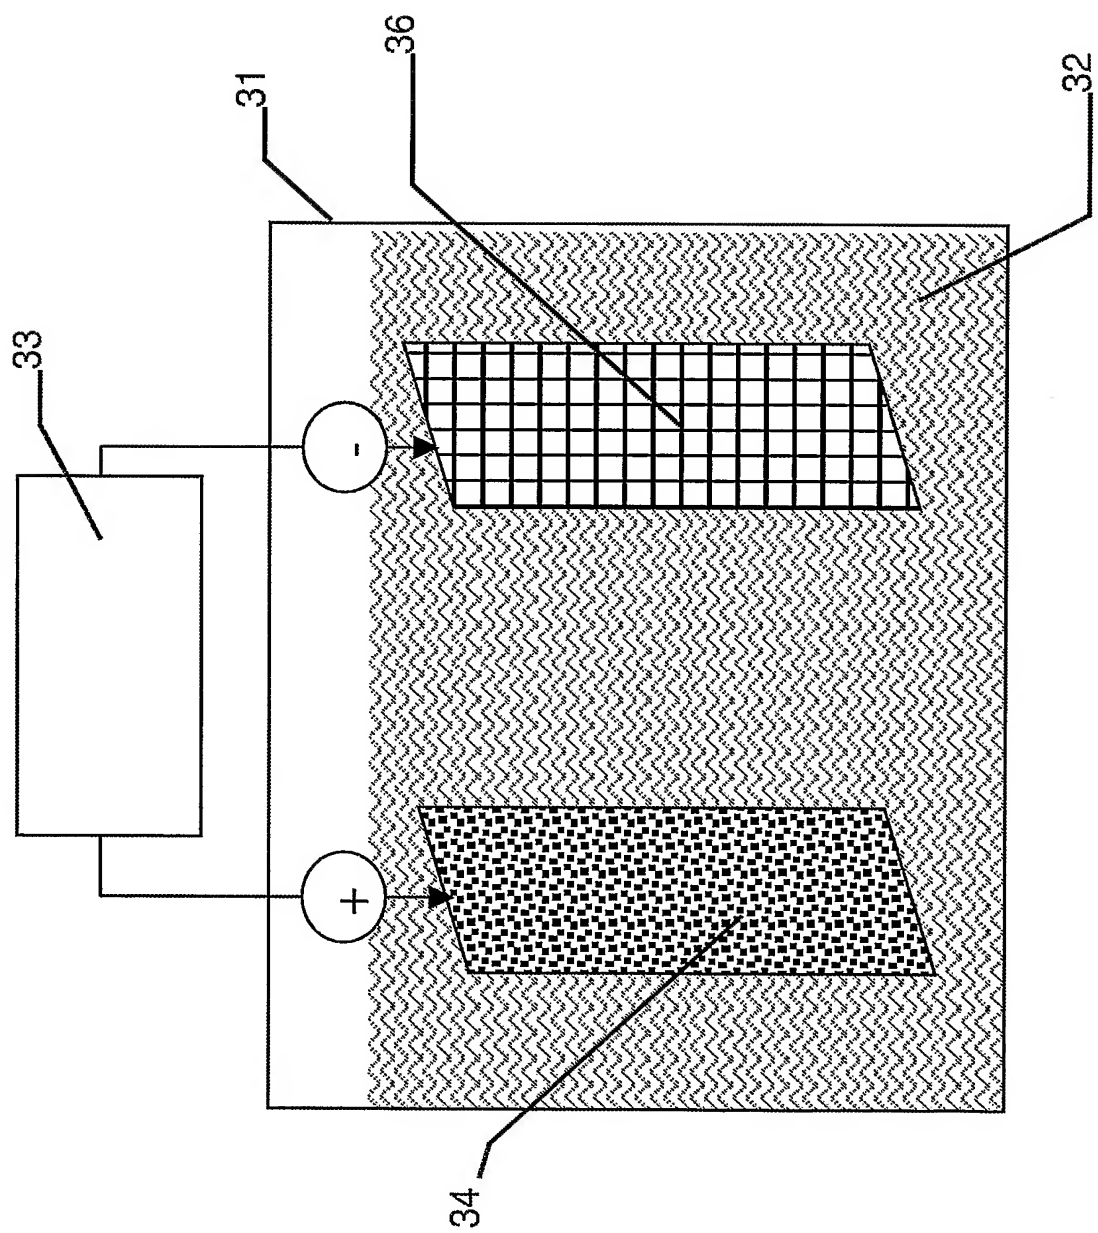


Fig. 3



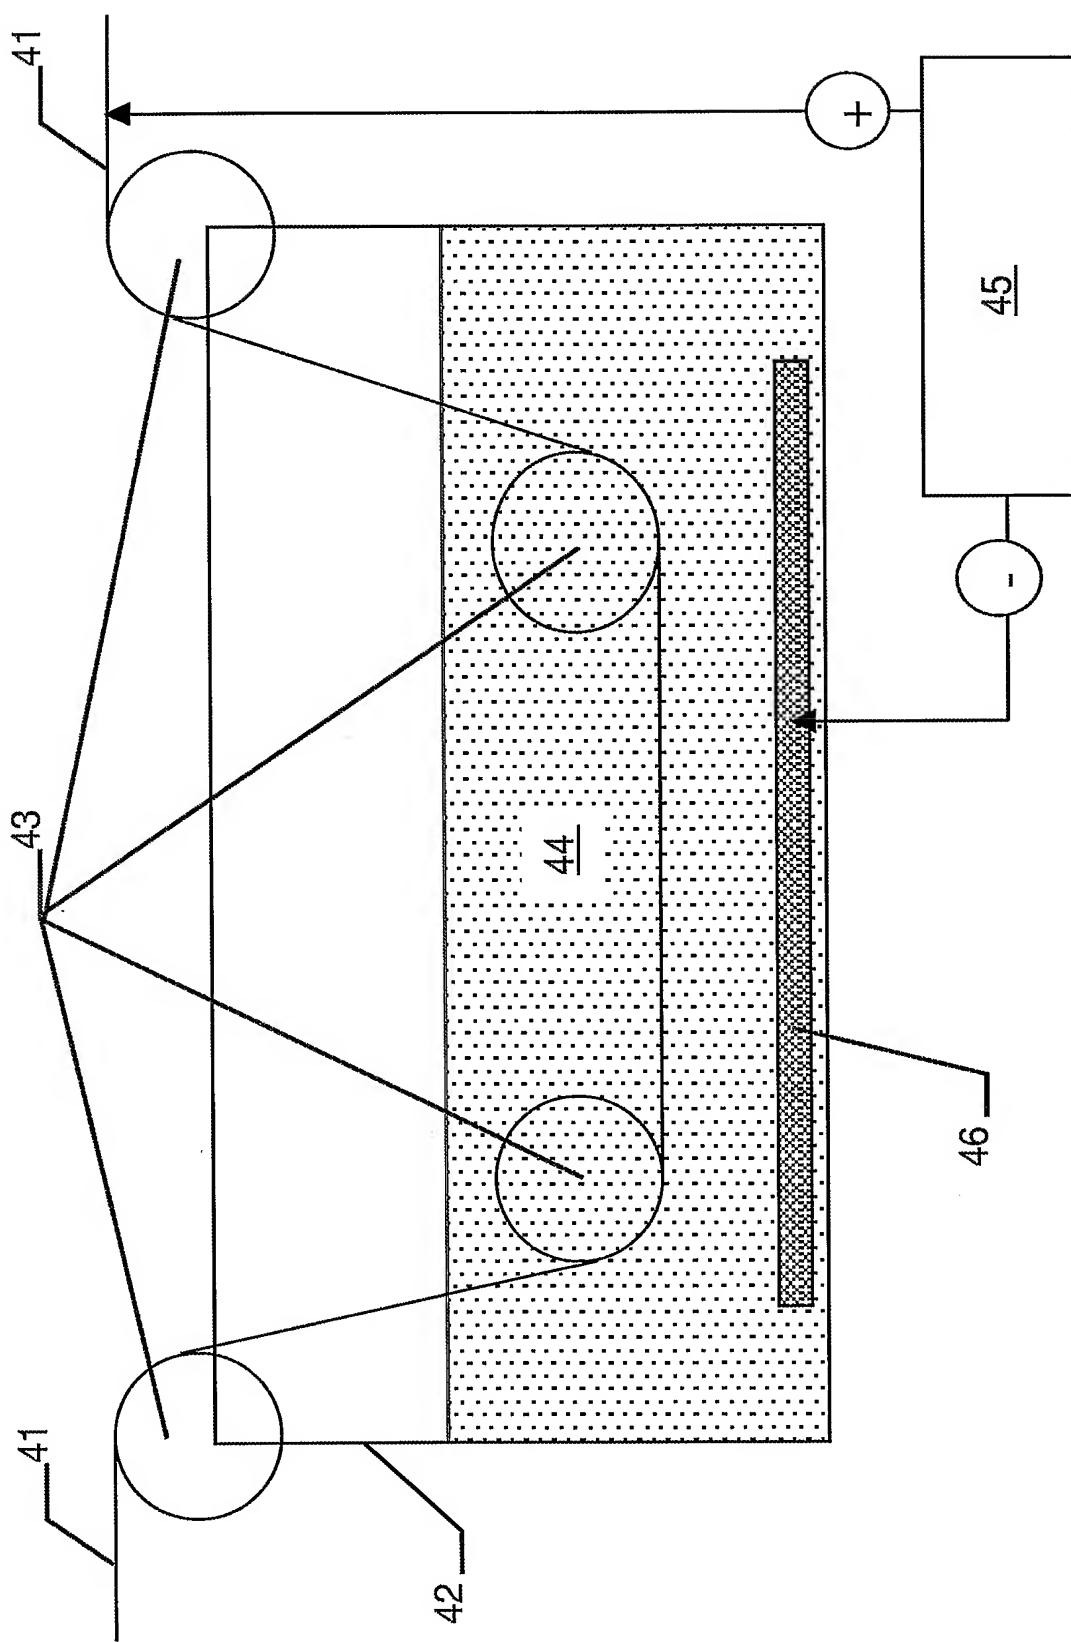


Fig. 4

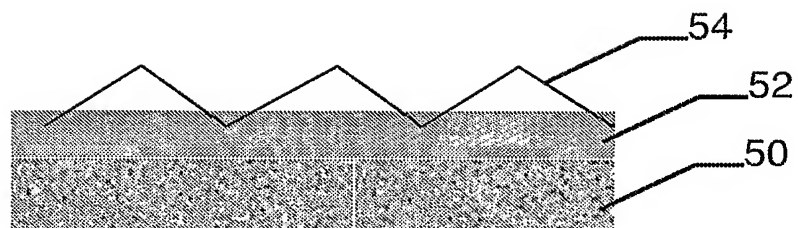


Fig. 5a

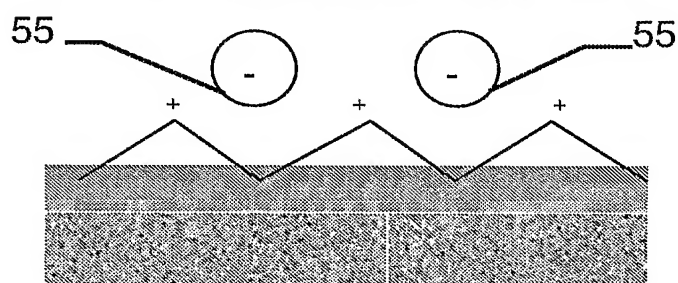


Fig. 5b

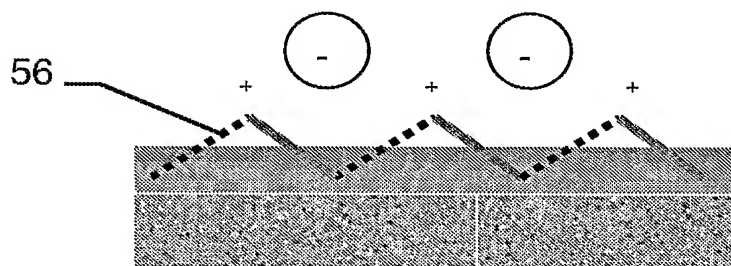


Fig. 5c

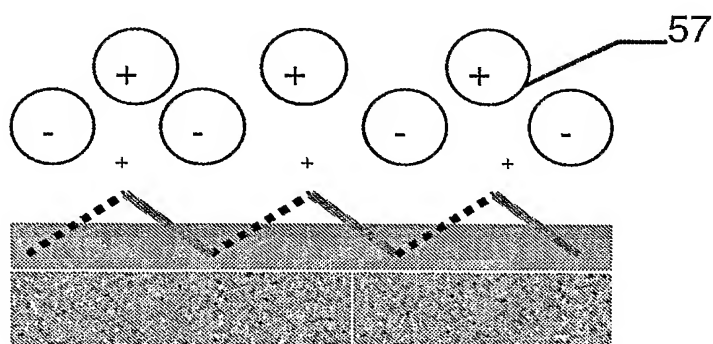


Fig. 5d

